

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
WO 03/062753 A1

(51) International Patent Classification<sup>7</sup>: G01C 21/34, G06F 17/30, G06T 11/20

(21) International Application Number: PCT/SE03/00085

(22) International Filing Date: 21 January 2003 (21.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0200167-5 21 January 2002 (21.01.2002) SE

(71) Applicant (for all designated States except US): IDEVIO AB [SE/SE]; Anders Carlssons Gata 7, S-417 55 Göteborg (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PERSSON, Johan [SE/SE]; Anders Carlssons Gata 7, S-417 55 Göteborg (SE).


Published:

— with international search report

(74) Agent: AWAPATENT AB; Box 11394, S-404 28 Göteborg (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND CARRIER OF MAP INFORMATION DATA

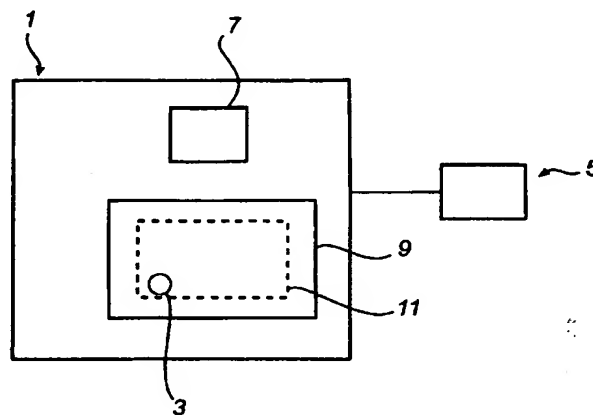

(57) Abstract: Device (1) and carrier for providing map information data (3) interactively to a display unit (5). The device (1) comprises a processor (7) and a memory (9) comprising a map information database (11) comprising map information data (3) representing geographical features, the map information data (3) being based on aggregations of at least one of nodes (15), links (17) and rings (19), each one of which corresponding to geographic features. The map information data (3) of a higher resolution level comprises additional map information data, resulting in more detailed map information (3) presented on the display unit (5), compared to the map information data (3) of a lower resolution level. The map information data (3) of a higher resolution level is generated by enhancement of the map information data (3) of a lower resolution level combined with the additional data, the enhancement being based on disaggregation of nodes (15), links (17) and rings (19). The processor (7) is configured for receiving a request for map information data (3); and providing map information data (3). Also, a device for providing map information data to a planning apparatus (33) for planning at least one of locations of society facility and travel routes is disclosed.

WO 03/062753 A1

DEVICE AND CARRIER OF MAP INFORMATION DATATechnical field of invention

- 5 One aspect of the present invention relates to a device for providing map information data interactively to a display unit operated by a user.

- Another aspect of the present invention relates to a map  
10 information data carrier to be used in a device for providing map information data.

- Yet another aspect of the present invention relates to a device for providing map information data to a planning  
15 apparatus for planning at least one of locations of society facility and travel routes.

- 20 Background of invention  
Digital maps are now finding their way to the public. We see them at many sites at Internet, in PC atlases, in handheld navigators, for instance of the GPS type, and in many other devices. Most data is geographically related  
25 and can therefore be presented at a map.

- Digital map data is either in raster or vector form. Raster maps are easy to use in applications since they have a uniform data structure where each pixel represents  
30 a color or a natural feature class but they have many

disadvantages compared to vector maps. The most obvious one is that they do not scale well since images turn blocky when zoomed. They also cannot contain extra information on features in the image. Vector maps on the other hand are more complex to use but offer more flexibility and contain more information.

Geographic databases can be very large and slow to access. Many geographic databases take several gigabyte of storage. Because of their complexity and size these databases are not used to the extent that they may deserve.

Preparation of data for a map application is a costly process. The most common technique today is to prepare one database for each presentation scale that the application uses. This makes it possible to see an overview of a large area without reading most of the database. The downside is of course that it is expensive and complex to handle several databases instead of one. Ideally one database would be efficient enough for the whole scale range that the application uses.

## Summary of invention

Automatic map information data generalization, or aggregation, is a promising ongoing field of research where the result is a number of resolution levels, each in a certain scale. The generalization process consists among other things of selecting the features that are suitable for a certain scale (or resolution level),

simplifying geometry of features and replacing some features with a different representation.

Automatic map information data generalization leads to  
5 databases presenting resolutions at a plurality of  
levels. A multi-resolution database, which is one of the  
central parts of the present invention, has the ability  
to return data in the resolution that the user requests.  
Not only should such a database be more efficient when  
10 requesting low resolution data than if requesting the  
original resolution, it should also be able to return a  
representation that is more suitable for the scale. One  
example is that cities could be represented by points at  
low resolutions and with polygons at high resolutions.

15  
One aspect of the present invention relates to a device  
for providing map information data interactively to a  
display unit operated by a user. Key hardware elements of  
the device include a processor and a memory comprising a  
20 map information database, or the multi-resolution  
database. The map information database comprises map  
information data representing geographical features. The  
map information data is based on aggregations of at least  
one of nodes, links and rings, each one of which  
25 corresponding to geographic features.

The structure of the node-link-ring approach is the  
following. A node can be seen as a point, or coordinate,  
related to at least one geographical feature. A link can  
30 be seen a line, even though the present invention also  
encompasses more advanced geometrical arrangements such  
as arcs, having nodes in each of its end points. A ring  
should be interpreted as a circular arrangement or a

polygonal arrangement. Also the arrangements also have to be closed. A ring is constituted by a plurality of links. Thus the internal structure of the approach is that the most basic component of the approach is the node,

5 followed by a link followed by a ring. Data, such as points, starting points, ring points, i.e. concerning the three components are stored. Also, attributes to a node, a link, or a ring are possible. Also it is possible that attributes are defined in higher level objects related to

10 rings, links and nodes. An attribute can be seen as a descriptor in relation to a for instance a point. An attribute can comprise a name, a distance between two points, altitude.

15 Combined with additional data, nodes, links and rings comprise all the necessary information that is needed to increase the resolution of the map information. What nodes, links and rings that will be provided by the device depend on the level of aggregation that

20 corresponds to a resolution level. Thus, aggregations offer a number of resolution levels, where the map information data of a higher resolution level comprises additional map information data, resulting in more detailed map information presented on the display

25 unit, compared to the map information data of a lower resolution level. The map information data of a higher resolution level is generated by enhancement of the map information data of a lower resolution level combined with the additional data, the enhancement being based on

30 disaggregation of at least one of the nodes, links and rings. The processor being configured for:  
-receiving from the user a request for map information data;

-providing to the display unit, in the case of the request being a first request, map information data at a predetermined resolution level and, in the case of the request being subsequent request, map information data at a higher resolution level. It should be pointed out that disaggregation also includes line resolution enhancement.

A key advantage of the present invention is that it makes multiple databases for different scales obsolete. Other advantages include a higher speed in the communication of map information data due to that less map information data is communicated as compared to prior art map information data communication techniques. Another advantage is a reduction of the cost for preparation and communication of map information. It also leads to a decreased need of storage space since the map information data requires less storage space.

According to one preferred embodiment the predetermined resolution level corresponds to the lowest resolution level. This offers the opportunity of allowing a user to start the use of the device at a level having the lowest resolution.

According to another embodiment the processor is further configured for, in the case of the request being subsequent request, providing map information data at a lower resolution level. This offers the opportunity of allowing a user to go back, i.e. to receive map information data of a level of lower resolution.

According to another embodiment, in the case of the request being subsequent request, the difference in

resolution level between a presently provided map information data and a previously provided map information data is 1, or greater than 1. This offers the opportunity of a user not to obtain map information data relating to a resolution level of which the user has no interest, i.e. it makes it possible to "jump over" one or more resolution levels. However, the device is arranged to disaggregate the nodes, links, and rings at each level in order to provide the map information data to be provided to the display unit.

In another embodiment the device further comprises communication means in order to communicate map information data to a more distant location. In such an embodiment the memory comprising the map information database is remotely located and accessible using the communication means. This offers the advantage of having easier updating of the map information of a map information company.

In another embodiment the database is arranged in memories at two locations, in which lower resolution levels are arranged in one memory and higher resolution levels are arranged in the other. This offers the exemplary advantage of user's to have a specific map information data as a starting point in the user's use process. As the map information data becomes more specific the required map information data is provided from a second device comprising a second memory comprising the map information database including higher resolution levels.

In another embodiment the display unit is constituted by a computer screen, i.e. the device and display unit is incorporated in the concept called personal computer.

5 In other embodiments the device further comprises means for communication between the device and the display unit and the display unit is constituted by one of a cell phone, personal digital assistant (PDA), and a navigator. These applications include providing map information data  
10 to a mobile setting. One present type of navigator is a GPS navigator. Another type of setting is the providing of map information data using a data communication network, such as the internet, to user. This includes the term internet maps.

15

Another aspect of the present invention is a carrier, such as a CD-ROM (CD ROM) or a portable drive, comprising the map information database, i.e. a map information data carrier to be used in a device for providing map  
20 information data, comprising a map information database comprising map information data representing geographical features. The map information data is based on aggregations of at least one of nodes, links and rings, each one of which corresponding to geographic features,  
25 offering a number of resolution levels. The map information data of a higher resolution level comprises additional map information data, resulting in more detailed map information presented on the display unit, compared to the map information data of a lower  
30 resolution level. The map information data of a higher resolution level being generated by enhancement of the map information data of a lower resolution level combined with the additional data, the enhancement being based on



disaggregation of at least one of the nodes, links and rings. This aspect is highly relevant in the context of so called a CD-Atlas (or CD Atlas). By using the carrier in relation to a computer the map information database is easily available. This aspect is closely related to the first aspect is therefore not described further here.

Yet, another aspect of the present invention deals with a device for providing map information data to a planning apparatus for planning at least one of locations of society facility and travel routes. The device comprises the same hardware components as the first device presented above. However, a chief difference is that the device is not arranged to provide the map information data to a display unit, but rather a planning apparatus. The structure of the map information database is the same, i.e. the map information data is based on aggregations of at least one of nodes, links and rings, each one of which corresponding to geographic features. Therefore the description is limited in these respects. The processor is configured for:

- receiving from the user a request for map information data;
- providing to the planning apparatus, in the case of the request being a first request, map information data at a predetermined resolution level and, in the case of the request being subsequent request, map information data at a higher resolution level.

A key advantage of this aspect is that it makes facilitates an easy and reliable way of providing map information data to a planning apparatus. For instance the device according to this aspect can be an important

tool in terms of planning of locations of society facility, such as where to locate super markets, hospitals, and the like. Also it can be used to plan roads stretches and the like. Another important use of  
5 the device according to this aspect is the planning of travel routes since the attributes of the node-link-ring approach can comprise distance data between two points in the geographical dimension.

10 The database using the node-link-ring approach is developed in the following way.

1. Read original geographic vector data for a region and clip it to that region.
2. Create a set of data with lower resolution and store  
15 it.
3. Create supplemental data so that these together with the lower resolution data can recreate the original data and store it separately.
4. Repeat the process from step 1 for all regions  
20 comprised in the database.
5. Read one or more adjacent regions at resolution R and separate in a lower resolution and in supplemental data for recreation of resolution R. Store the supplemental for each of the read regions.  
25 Join the clipped objects at the borders and store the low-resolution data in the database.
6. Repeat step 5 for all regions at the current resolution in the database.
7. Repeat from step 5 with a lower resolution until the  
30 lowest required resolution is reached.

Lexical section

The term cell phone is here considered to include cell phone, cellphone, cellular phone, mobile telephone and mobile phone.

- 5 The term geographical (geography) is here considered to include topographical (topography), topological (topology) and demographical (demography).

The term map information data is here considered to  
10 include river, lake, sea, city, part of city, such as a suburb, building, house, road, street, railroad, canal, forest, area under cultivation, mountain, and altitude indicator.

- 15 Also included in the term map information data are the contents of the attributes that convey information to the map information data. Types of attributes include name, symbols, such as flags, distance e.g. between nodes, map line features, such as thickness and structure (e.g.  
20 dashed line), population, and different types of forests.

#### Brief description of the drawings

- 25 The disclosure of the present invention is supported by use of the following drawings.

Figure 1 schematically presents an embodiment of a device  
30 for providing map information data interactively to a display unit operated by a user.

Figure 2 schematically presents a node, a link and a ring.

Figure 3 schematically presents another embodiment of a device for providing map information data interactively to a display unit operated by a user.

5

Figure 4 schematically presents another embodiment of a device for providing map information data interactively to a display unit operated by a user.

10 Figure 5 schematically presents yet another embodiment of a device for providing map information data to a planning apparatus for planning at least one of locations of society facility and travel routes is disclosed.

15 Figures 6A, 6B, 6C and 6D schematically present a map comprised in the database at different resolution levels.

20 Description of preferred embodiments

In Figure 1, a device 1 for providing map information data 3 interactively to a display unit 5 operated by a user is presented. The device 1 comprises a processor 7  
25 and a memory 9 comprising a map information database 11. The map information database 11 comprises map information data 3 representing geographical features. The map information data 3 is based on aggregations of at least one of nodes 15, links 17 and rings 19, each one of which  
30 corresponding to geographic features. The structure of the node 15, links 17 and rings 19 offer a number of resolution levels. In Figure 2, examples of a node 15, a link 17, and a ring 19 are presented. As can be seen in

Figure 2, a ring 19 consists of a number of related links 17 and nodes 15, and a link 17 consists of two connected nodes 15.

- 5 In one preferred embodiment, there are attributes, as described above, associated with the nodes 15, links 17 and rings 19.

10 The map information data 3 of a higher resolution level comprises additional map information data, resulting in more detailed map information data 3 presented on the display unit 5, compared to the map information data 3 of a lower resolution level.

15 The map information data 3 of a higher resolution level is generated by enhancement of the map information data 3 of a lower resolution level combined with additional data. The enhancement is based on disaggregation of at least one of the nodes 15, links 17, and rings 19.

20 The processor 7 is configured for:  
-receiving from the user a request for map information data 3;  
-providing to the display unit 5, in the case of the request being a first request, map information data 3 at  
25 a predetermined resolution level and, in the case of the request being subsequent request, map information data 3 at a higher resolution level.

In a preferred embodiment the predetermined resolution  
30 level corresponds to the lowest resolution level being a geodata level. In a preferred embodiment the processor 7 is further configured for, in the case of the request

being subsequent request, providing map information data 3 at a lower resolution level.

On a preferred embodiment, in the case of the request  
5 being subsequent request, the difference in resolution level between a presently provided map information data 3 and a previously provided map information data 3 is 1, or greater than 1. This leads to the possibility of the user to obtain map information data 3 at a desired level  
10 without having to wait for the communication of the map information data 3 related to resolution levels that the user is not interested to obtain. However, the processor 7 disaggregates the map information of the intermediate resolution levels but they are not provided to the  
15 display unit 5.

In a preferred embodiment presented in Figure 3, the device further 1 comprises communication means 23 and wherein the memory 9 comprising the map information  
20 database 11 is remotely located and accessible using the communication means 23. In this embodiment the communication means 23 is constituted by a data communication network.

25 In a preferred embodiment, the database 11 of the device 1 is arranged in memories 9 at two locations, in which lower resolution levels are arranged in one memory 9 and higher resolution levels are arranged in the other memory 9. This is presented in Figure 4.

30

In a preferred embodiment the display unit 5 is constituted by a computer screen.

In other preferred embodiments of the device 1 comprising means for communication 23 between the device 1 and the display unit 5, where the display unit 5 is constituted by one of a cell phone, personal digital assistant (PDA),  
5 and a navigator, i.e. the device 1 is technically applicable in a cell phone, personal digital assistant (PDA), and a navigator.

In one embodiment a map information data carrier to be  
10 used in relation to a device 1 for providing map information data 3 is hereby disclosed. It comprises the map information database 11 comprising map information data 3 as has been described above. Due to the similarities with the description above, this will not be  
15 described again.

In another preferred embodiment a device 31 is disclosed, for providing map information data 3 to a planning apparatus 33 for planning at least one of locations of  
20 society facility and travel routes. The device 31 comprises a processor 7 and a memory 9 comprising a map information database 11. The map information database 11 comprises map information data 3 representing geographical features. The map information data 3 is  
25 based on aggregations of at least one of nodes 15, links 17 and rings 19, each one of which corresponding to geographic features, offering a number of resolution levels. The map information data 3 of a higher resolution level comprises additional map information data 3,  
30 resulting in more detailed map information, compared to the map information data 3 of a lower resolution level. The map information data 3 of a higher resolution level is generated by enhancement of the map information data 3

15

of a lower resolution level combined with the additional data. The enhancement is based on disaggregation of at least one of the nodes 15, links 17 and rings 19. The device 31 also comprises communication means 35 for  
5 communicating the map information data 3 to the planning apparatus 33. In this embodiment the communication means 35 is constituted by one of a data communication network, such as the internet, and a floppy disk stations-floppy disk arrangement.

10

The processor 7 is configured for:

- receiving from the user a request for map information data 3;
- providing to the planning apparatus 33, in the case of  
15 the request being a first request, map information data 3 at a predetermined resolution level and, in the case of the request being subsequent request, map information data 3 at a higher resolution level.

20 Now turning to the map information data 3 at the different resolution levels as it is used by the device 1 and the device 31, a simple example of the disaggregation of map information data 3 covering four resolution levels is presented in Figures 6A, 6B, 6C and  
25 6D.

In Figure 6A the example of map information data 3 is presented at the lowest resolution level. Using the node, link and ring approach the information presented in  
30 Figure 6A will consist of the following structural aggregation.



16

- Node NB (point=<coordinate>)
- Link LAC (startNode=NB, endNode=NB, breakpoints=<coordinate>,...)
- Ring RAB (links=LAC)

5

These objects are completely defined in the low-resolution geodata including coordinates and reference each other.

- 10 In Figure 6B, the map information data 3 presented in Figure 6A is presented with a higher resolution level compared to the map information data 3 presented in Figure 6A. Using the function of link enhancement leads to a disaggregation of the map information presented in
- 15 Figure 6A to the map information presented in Figure 6B.

LinkEnhance (link=LAC waveletParameters=<numbers>)

- Thus the function link enhancement enhances the
- 20 resolution of the link LAC. This is done by one step of the inverse wavelet transform (or similar to multi-resolution transform) using the old breakpoints as the low frequency parameters and the enclosed wavelet parameters as the high frequency component. This creates
- 25 new breakpoints that closer describe the correct link.

- In Figure 6C the map information data 3 presented in Figure 6B is presented with a higher resolution level compared to the map information data 3 presented in
- 30 Figure 6B. Using the function of link clipping, the link LAC is divided to two sub links, LA and LC. This also leads to the formation of the node NA.

Node NA (point=<coordinate>)  
LinkClip (link=LAC afterBreakPoint=2 node=NA)

Thus, clip link LAC after the breakpoint and connect the  
5 new links (LA and LC) to the new node NA. Since the ring  
RAB referenced LAC was clipped, it must be updated to  
reference LA and LC instead.

In Figure 6D, the map information data 3 presented in  
10 Figure 6C is presented with a higher resolution level  
compared to the map information data 3 presented in  
Figure 6C. Using the function of ring splitting, the ring  
RAB of Figure 6C is divided into two sub rings, RA and  
RB.

15

Link LB (startNode=NA, endNode=NB, breakpoints=<coordinate>,...)  
RingSplit (ring=RAB link=LB)

Thus, this splits ring RAB at the new link LB and creates  
20 the two new rings RA and RB. The example above could in  
the highest resolution for instance represent two areas  
of forest, one with broad-leaf trees and one with  
coniferous trees. At the lower resolution the two areas  
are aggregated and represent just forest. In Figures 6B  
25 to 6D, the intermediate resolution levels that are at  
least calculated, but not necessarily provided to the  
display unit, to receive the next resolution level.

## PATENT CLAIMS

1. Device (1) for providing map information data (3) interactively to a display unit (5) operated by a user;  
-the device (1) comprising a processor (7) and a memory  
5 (9) comprising a map information database (11);  
-the map information database (11) comprising map information data (3) representing geographical features, the map information data (3) being based on aggregations of at least one of nodes (15), links (17) and rings (19),  
10 each one of which corresponding to geographic features, offering a number of resolution levels, where  
-the map information data (3) of a higher resolution level comprises additional map information data, resulting in more detailed map  
15 information (3) presented on the display unit (5), compared to the map information data (3) of a lower resolution level, and  
-the map information data (3) of a higher resolution level being generated by enhancement  
20 of the map information data (3) of a lower resolution level combined with the additional data, the enhancement being based on disaggregation of at least one of the nodes (15), links (17) and rings (19);  
25 the processor (7) being configured for:  
-receiving from the user a request for map information data (3);  
-providing to the display unit (5), in the case of the request being a first request, map information data (3)  
30 at a predetermined resolution level and, in the case of the request being subsequent request, map information data (3) at a higher resolution level.

2. Device according to claim 1, wherein the predetermined resolution level corresponds to the lowest resolution level.
- 5 3. Device according to claim 1, wherein the processor (7) is further configured for, in the case of the request being subsequent request, providing map information data (3) at a lower resolution level.
- 10 4. Device according to claim 1, wherein, in the case of the request being subsequent request, the difference in resolution level between a presently provided map information data (3) and a previously provided map information data (3) is 1, or greater than 1.
- 15 5. Device according to claim 1, further comprising communication means (23) and wherein the memory (9) comprising the map information database (11) is remotely located and accessible using the communication means (23).
- 20 6. Device according to claim 1, further comprising communication means (23) and wherein the database (11) is arranged in memories (7) at two locations, in which lower resolution levels are arranged in one memory (7) and higher resolution levels are arranged in the other memory (7).
- 25 7. Device according to claim 1, wherein the display unit (5) is constituted by a computer screen.
- 30

8. Device according to claim 1, further comprising communication means (23) between the device (1) and the display unit (5), and the display unit (5) being constituted by one of a cell phone, personal digital assistant (PDA), and a navigator.

9. A map information data carrier to be used in a device for providing map information data, comprising a map information database (11) comprising map information data (3) representing geographical features, the map information data (3) being based on aggregations of at least one of nodes (15), links (17) and rings (19), each one of which corresponding to geographic features, offering a number of resolution levels, where

15 -the map information data (3) of a higher resolution level comprises additional map information data (3), resulting in more detailed map information presented on the display unit (5), compared to the map information data (3) of a lower resolution level, and

20 -the map information data (3) of a higher resolution level being generated by enhancement of the map information data (3) of a lower resolution level combined with the additional data, the enhancement being based on disaggregation of at least one of the nodes (15), links

25 (17) and rings (19).

10. Device for providing map information data to a planning apparatus (33) for planning at least one of locations of society facility and travel routes;

30 -the device (31) comprising a processor (7) and a memory (9) comprising a map information database (11);

-the map information database (11) comprising map information data (3) representing geographical features,



the map information data (3) being based on aggregations of at least one of nodes (15), links (17) and rings (19), each one of which corresponding to geographic features, offering a number of resolution levels, where

- 5           -the map information data (3) of a higher resolution level comprises additional map information data, resulting in more detailed map information, compared to the map information data (3) of a lower resolution level, and
- 10          -the map information data (3) of a higher resolution level being generated by enhancement of the map information data (3) of a lower resolution level combined with the additional data, the enhancement being based on
- 15          disaggregation of at least one of the nodes (15), links (17) and rings (19);

the processor (7) being configured for:

- receiving from the user a request for map information data (3);
- 20    -providing to the planning apparatus (33), in the case of the request being a first request, map information data (3) at a predetermined resolution level and, in the case of the request being subsequent request, map information data (3) at a higher resolution level.

1/3

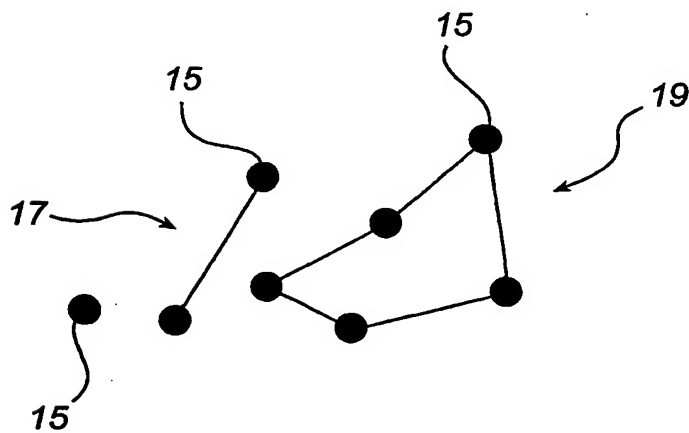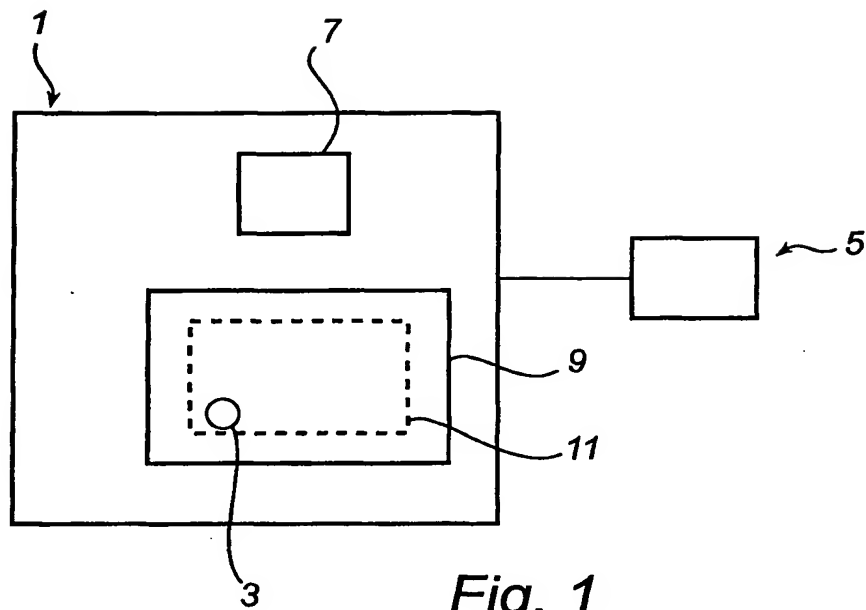

2/3

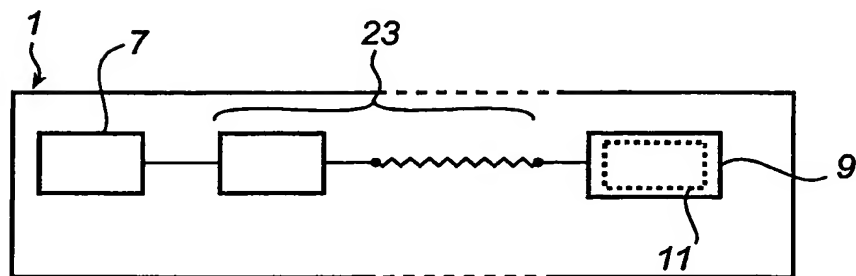


Fig. 3

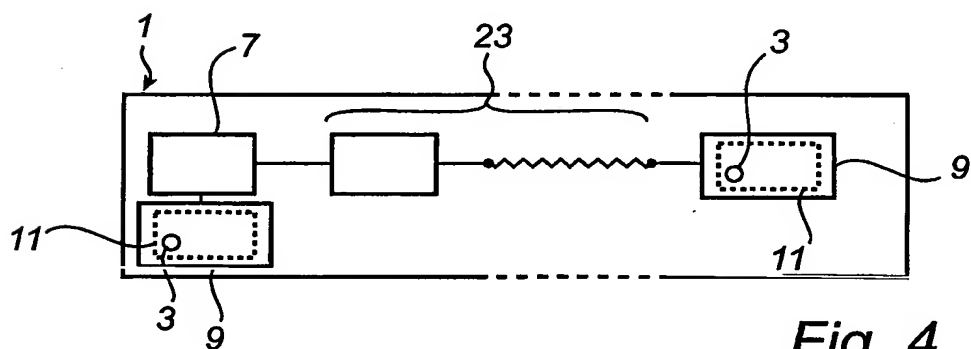


Fig. 4

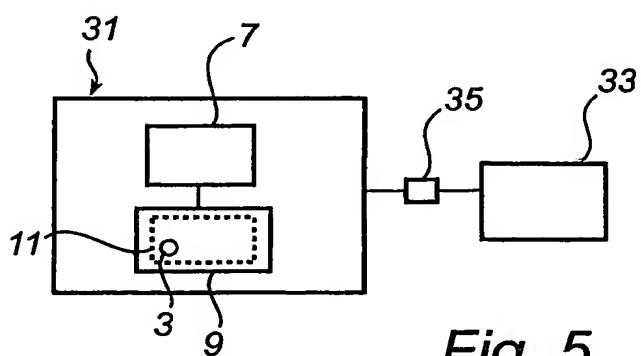


Fig. 5



3/3




Fig. 6a




Fig. 6b

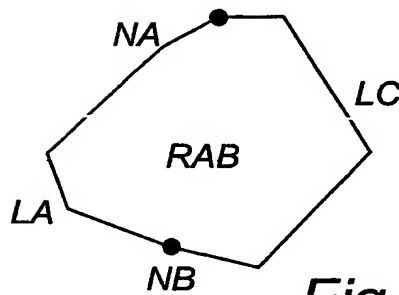


Fig. 6c

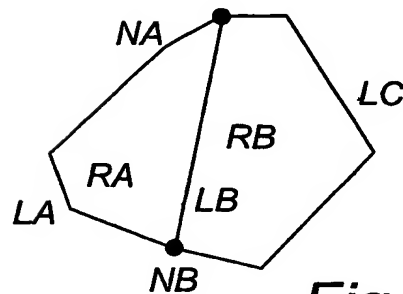


Fig. 6d

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 00085

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G01C 21/34, G06F 17/30, G06T 11/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01C, G06F, G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6337693 B1 (G.ROY ET AL), 8 January 2002 (08.01.02), column 2, line 2 - line 25; column 3, line 60 - line 67; column 12, line 4 - line 29, col.13,11.30-11.64	1-9
Y	--	10
Y	US 6282489 B1 (K.J.BELLESFIELD ET AL.), 28 August 2001 (28.08.01), claim 1, abstract	10
A	LI X.et al: "WEB-BASED DISTRIBUTION OF GIS METROPOLITAN MAPS" IN: FIFTH INTERNATIONAL CONFERENCE ON INFORMATION VISUALISATION, 25-27 July 2001, London, UK, pages 419-424	1-10

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

3 April 2003

Date of mailing of the international search report

08-04-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Göran Magnusson /itw

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

28/02/03

International application No.

PCT/SE 0085

Patent document cited in search report				Publication date		Patent family member(s)		Publication date	
US	6337693	B1	08/01/02	US	2002039108 A	04/04/02			
				US	5966135 A	12/10/99			
-----									
US	6282489	B1	28/08/01	US	6498982 B	24/12/02			
				US	2002038180 A	28/03/02			
-----									

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**